


5043 Farlin Ave
St. Louis, MO 63115
www.associatedequip.com

Model 6068

Powerful Performance – Parallel
Battery Charger

6068 Features

- 110 Amp Output at 15.5 Volts
- Charges 1-36, 12 volt batteries in less than 24 hours in parallel
- Designed for 190 – 262VAC 50/60Hz electrical environments
- Includes a pigtail rectifier with a deep reserve capacity
- Digital Control shows testing efficiency results
- Additional accessories available
- UL listed
- 1-Year warranty
- Made in USA

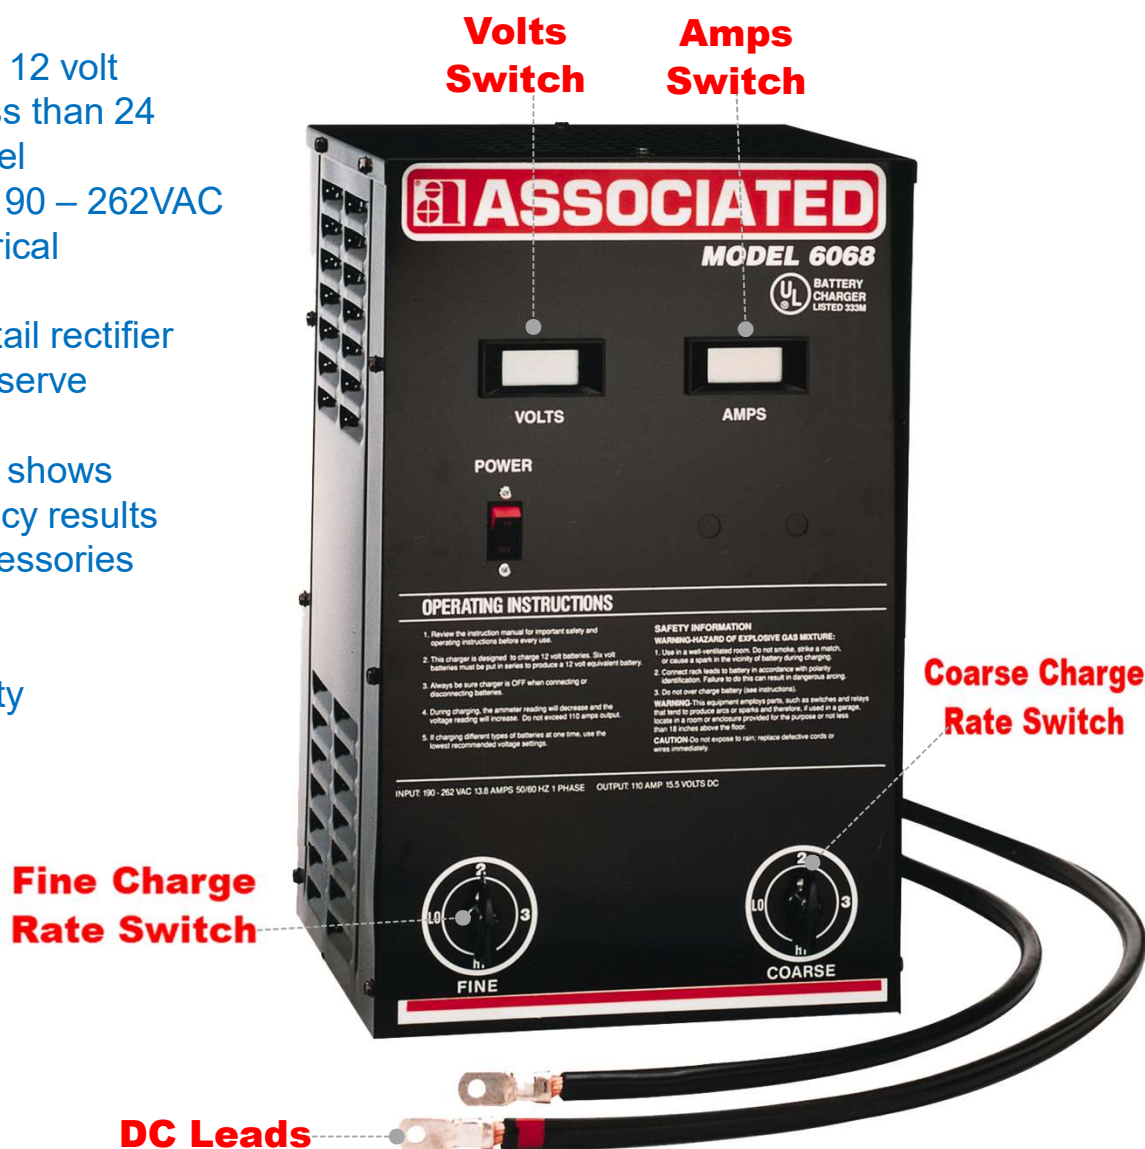

D.C. Output	A.C. Input	Charging Capacity	Battery Types	Charge Rate Settings	DC Cable Length and Gage	Clamp Rating	A/C Cord Length	Weight (Pounds) Lbs	Dimensions (LxWxH)
110A 15.5V	190-262V 13.9A 50/60Hz	Up to 36 12V Batteries	SLA, AGM, Gel-Cell, EFB, Lithium-Ion	16	5' 1AWG	N/A	Permanent Installation Only	83	14x16x26